



## Dock Cushion Seal Measurement Sheet

Walmart Store # \_\_\_\_\_

Ship to Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

City FM \_\_\_\_\_  
Tech Name: \_\_\_\_\_  
Phone #: \_\_\_\_\_  
Email: \_\_\_\_\_

### Loading Dock Survey Sheet

The inside opening of the door being sealed has a width of \_\_\_\_\_ x height of \_\_\_\_\_

The height of the Loading Dock is \_\_\_\_\_ inches

the distance from the outside wall to the face of the bumper is how many inches?  
\_\_\_\_\_

The side and top of the door opening need to be clear of obstructions that would interfere with the installation of the seal.

Top clearance \_\_\_\_\_

Side clearance \_\_\_\_\_

Is the building Metal \_\_\_\_\_ or brick \_\_\_\_\_

what is the slope of the loading dock approach?  
level Drive \_\_\_\_\_ Yes \_\_\_\_\_ No

For drives that are sloped

Take a 60' piece of string and attach it to the floor of your loading dock as close as possible to the center of the dock. Walk 50' out from the dock along the approach path. Use a line level to level the string. Measure the drop between the leveled line and the ground.



What was the result of the leveled string to the ground? \_\_\_\_\_

Often times this specific information can help us suggest the most energy efficient seal that will accommodate your needs.

Truck height used  
to \_\_\_\_\_  
Range of truck width  
to \_\_\_\_\_

Do you require full access the the truck height? no yes  
Do you require full access to the truck width? no yes

**Please note: Tristate Commercial Doors is not responsible for any errors in measuring by responding techs - please double check your measurements**

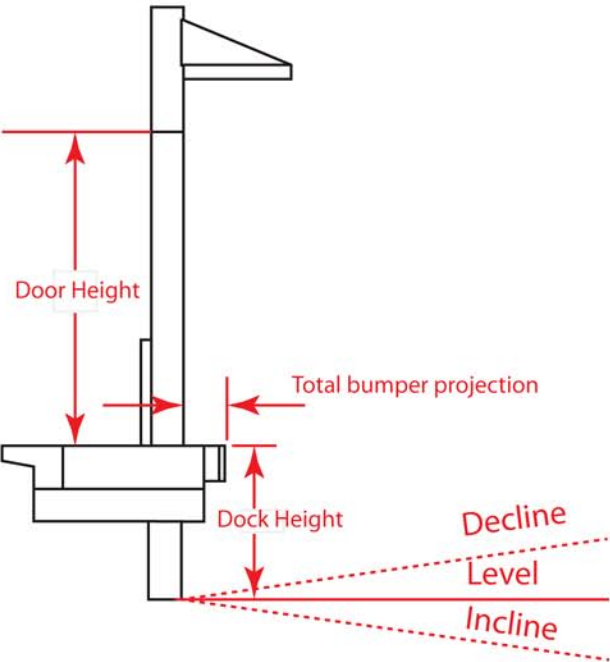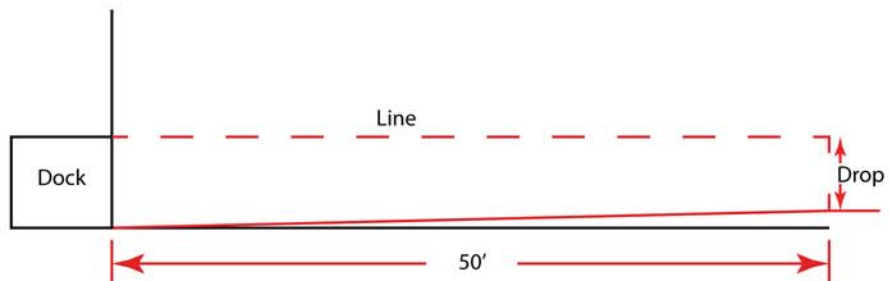

Note if less than 18" of clearance around door

